

SKU: YS4239

-  VOLT Y Type Brass Strainer Standard Pattern
-  VOLT Y -Typ Schmutzfänger Messingstandardmuster
-  VOLT Escriba Y Latón Patrón Tamiz Estándar
-  VOLT Tapez Y Laiton Motif crépine standard

**Valves™**  
**ONLINE**

- 1/4 " - 4" Brass Y Type Strainer
- 1/4 " - 4" Messing Y -Typ Schmutzfänger
- 1/4 " - 4" Brass Y Tipo Colador
- 1/4 " - 4" Brass Y Type de crépine

## Brass Strainer Screwed BSP



### Description

**Compact and Reliable our Y Type Strainer in Brass. Screwed BSPP, giving a 0.5mm filtration screen. Recommended for applications where damage to valves or prime equipment needs to be avoided. Economic, lightweight and compact in size.**



### Description

Economic brass Y type strainer, manufactured to the highest standards. PN16 rated and sizes from 1/4" - 4". Easy to Maintain.



### Beschreibung

Wirtschafts Messing Y-Typ Schmutzfänger , nach den höchsten Standards gefertigt. PN16 bewertet und Größen von 1/4 " - 4" leicht zu pflegen



### Descripción

Latón Económico filtro tipo Y , fabricados con los más altos estándares . PN16 nominal y tamaños desde 1/4 " - 4 " Fácil de mantener




### Description

Laiton économique de type Y crépine , fabriqué selon les normes les plus élevées . PN16 nominale et tailles de 1/4 " - 4 " facile à entretenir.

-  VOLT Y Type Brass Strainer Standard Pattern
-  VOLT Y -Typ Schmutzfänger Messingstandardmuster
-  VOLT Escriba Y Latón Patrón Tamiz Estándar
-  VOLT Tapez Y Laiton Motif crépine standard

### Brass Y Type Strainer

| Dimensions |     |     |       |
|------------|-----|-----|-------|
| Size d     | L   | H   | W(kg) |
| 1/4"       | 48  | 33  | 0.16  |
| 3/8"       | 56  | 33  | 0.16  |
| 1/2"       | 56  | 34  | 0.17  |
| 3/4"       | 63  | 42  | 0.2   |
| 1"         | 75  | 50  | 0.28  |
| 1 1/4"     | 91  | 63  | 0.56  |
| 1 1/2"     | 102 | 70  | 0.68  |
| 2"         | 118 | 87  | 1.33  |
| 2 1/2"     | 150 | 108 | 1.99  |
| 3"         | 167 | 148 | 2.85  |
| 4"         | 226 | 185 | 5.37  |

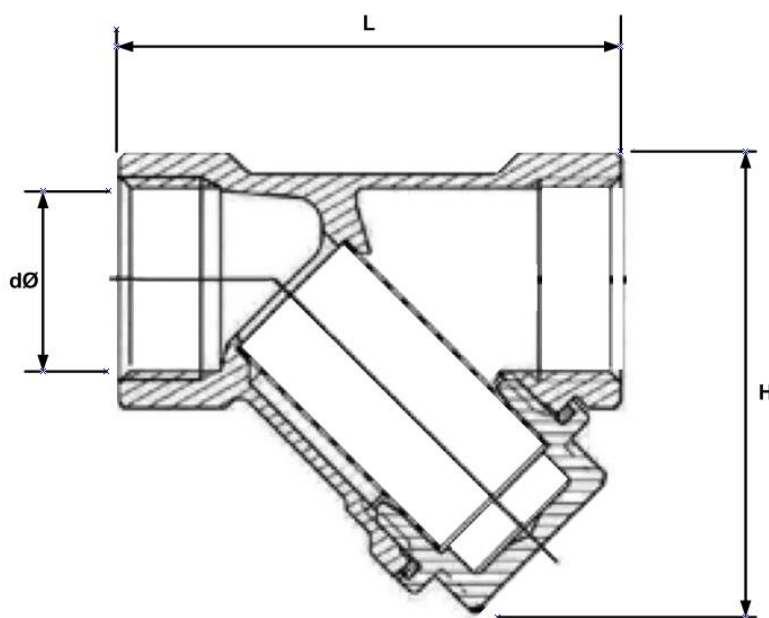

| Material      |                |
|---------------|----------------|
| Body          | Brass          |
| Filter Screen | Steel AISI 304 |
| Gasket        | NBR            |
| Plug          | Brass          |

| Pressure/Temperature |                                 |
|----------------------|---------------------------------|
| Max Working Pressure | 16 Bar                          |
| Max Temperature      | 110 Deg C                       |
| Screen Size          | 0.5mm 500, Micron, 35 U.S. Mesh |

| Size   | Kv   |
|--------|------|
| 1/2"   | 4,6  |
| 3/4"   | 7,8  |
| 1"     | 11,2 |
| 1 1/4" | 16,1 |
| 1 1/2" | 22,5 |
| 2"     | 27,0 |
| 2 1/2" | 32,0 |
| 3"     | 57,0 |
| 4"     | 95,0 |