

SKU: YS5046

-  Hygienic Pump Protection Strainer
-  Hygienepumpe Schutz Schmutzfänger
-  Higiénico Bomba Protección Colador
-  Hygénique Pompe protection Passoire

Valves[™]
O N L I N E

- 1" - 6" Stainless Y Type Strainer used for Pump Protection
- 1" - 6" Rostfreier Y -Typ Schmutzfänger für Pumpenschutz verwendet
- 1" - 6" Acero Y Tipo Colador utiliza para protección de la bomba
- 1" - 6" Y inoxydable filtre à tamis utilisés pour la protection de la pompe



Stainless Steel Y Type Pump Protection Strainer



Description

A well designed strainer that offers pump protection in sanitary environments. Consisting of Element, Body, Single Hinged Clamp and 1 x Lipped EPDM joint ring. Shut off valves can be welded onto the strainer. We would recommend that a spare element be ordered to minimise down time and ease cleaning



Beschreibung

Eine gut gestaltete Schmutzfänger , die Pumpenschutz in Sanitärumgebungen bietet . Bestehend aus Element, Körper, Alleinklapperring und 1 x Lipped EPDM Dichtring . Absperrventile können auf das Sieb angeschweißt werden. Wir würden empfehlen, dass ein Ersatzelement befohlen, Ausfallzeiten zu minimieren und Leichtigkeit Reinigung werden



Descripción

Un colador bien diseñado que ofrece bombear protección en entornos sanitarios. Consta de Element , Cuerpo , Individual con bisagras Clamp y 1 x Lipped EPDM anillo de articulación. Válvulas de cierre se pueden soldar en el colador. Le recomendamos que un elemento de repuesto condenarla a minimizar el tiempo de inactividad y la facilidad de limpieza



Description

Un filtre bien conçu qui offre pomper protection dans les environnements sanitaires . Composée d' éléments , le corps, l'unité charnière Clamp et 1 x à lèvres EPDM joint annulaire . Vannes d'arrêt peuvent être soudés sur la crépine . Nous recommandons qu'un élément de réserve soit ordonné à minimiser les temps et faciliter le nettoyage

- **Stainless Steel 316L**
- **1" - 6" OD line Size**
- **240 grit OD Finish**
- **1", 1.5" & 2.5" line sizes, a concentric reducing cone will be used on a standard body**
- **Various ends can be supplied**


DESCRIPTION

Stainless steel pump protection strainer in 316L, is designed to remove debris that has the potential to damage the pump as it passes through. Compact in size yet efficient and offers ease of cleaning and changing element baskets.

Hygienic Pump Protection Strainer

Pressure and Temperature to be Advised

Dimensions			
Size	A	B	C
1"	307	200	263
1 1/2"	277	200	263
2"	201	20	263
2 1/2"	370	250	367
3"	290	250	367
4"	540	360	510
6"	473	400	550

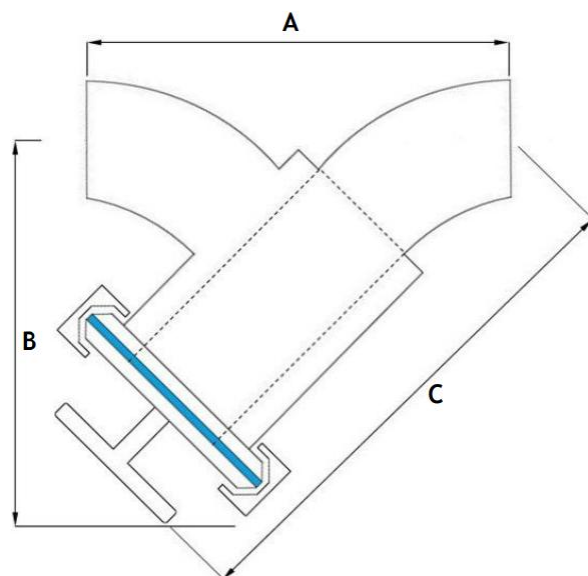

1", 1.5" & 2.5" line sizes, a concentric reducing cone will be used on a standard body

Made from 316 stainless steel.

1mm and 1.5mm hole sizes available ex-stock other sizes on request.



Element assembly consists of: 1 x element & 1 x clamp blank. Perforations are staggered pitch – @ 60 degree's.

All elements come complete with a 5/6mm plain boarder.

Inner/Outer mesh wrap can be supplied.

Rigid elements suitable for reverse flushing (unless over/inner wrapped)

Suitable for C.I.P & S.I.P

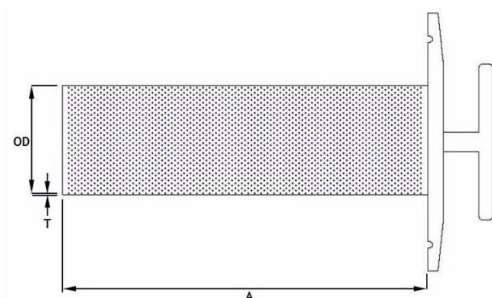

Dimensions							
Size	Element	OD	A	T	H	P	Open Area %
1"	1mm hole	46.5	130	0.8	1	2	22.70%
1"	1.5mm hole	46.5	130	1	1.5	3	22.70%
1 1/2"	1mm hole	46.5	130	0.8	1	2	22.70%
1 1/2"	1.5mm hole	46.5	130	1	1.5	3	22.70%
2"	1mm hole	46.5	130	0.8	1	2	22.70%
2"	1.5mm hole	46.5	130	1	1.5	3	22.70%
2 1/2"	1mm hole	72	205	0.8	1	2	22.70%
2 1/2"	1.5mm hole	72	205	1	1.5	3	22.70%
3"	1mm hole	72	205	0.8	1	2	22.70%
3"	1.5mm hole	72	205	1	1.5	3	22.70%
4"	1mm hole	97	238	1	1	2	22.70%
4"	1.5mm hole	97	238	1	1.5	3	22.70%
6"	1mm hole	149	323	1	1	2	22.70%
6"	1.5mm hole	149	323	1	3	5	22.70%

